

# SASCO POTENTIOMETER

## Throttle Position Sensor

SG-511-SSAT Series



Typical Application: Throttle & Pedal Position

Features / Benefits:

- Sealed, Spring Return Rotor
- Non-Adjustable Mounting
- Clockwise Rotation
- Mates with 3 Way "Mini-Timer" Style Connector

### TYPICAL SPECIFICATIONS

#### ELECTRICAL

Total Resistance(Terminal 1-3):	2.0 K $\Omega$ $\pm$ 20%
Wiper protection resistance (Wiper in zero-position,terminals 1-2):	1.0 K $\Omega$ $\pm$ 20%
Linearity:	$\leq \pm 1\%$ (independent)
Usable Electrical Angle Area:	107 $^{\circ}$
Angle Between Internal Stops:	110 $^{\circ}$
Output Slope:	1 % / deg = 50 mV / deg
Idle Voltage:	450 $\pm$ 150 mV
W.O.T Voltage:	4450 $\pm$ 450 mV
Hysteresis:	$\leq 1\%$ Applied Voltage
Electrical Limit:	16 VDC Maximum
Operation voltage:	5 V
Maximum Power Rating:	0.08 Watts

#### MECHANICAL

Right Stop Position:	0 $^{\circ}$
Left Stop Position:	110 $^{\circ}$
Torque:	Start of Rotation, >0.015 Nm End of Rotation, <0.12 Nm
Stop Strength:	0.8 N
Air Passage Leak	No leak in air pressure= 2 bar

#### DURABILITY

Mechanical Cycling:	1.0 $\times 10^6$ Full Strokes 0.5 $\times 10^6$ Half Cycles 5.0 $\times 10^6$ Dither Strokes
Standard Vibration:	24 hrs; 3 Planes 10 to 250 Hz; 1.36 – 32 g, 0 $^{\circ}$ to 80 $^{\circ}$ C
Thermal Shock:	100 Cycles, -40 $^{\circ}$ to 135 $^{\circ}$ C
Temperature Range (Operation & Storage):	-40 $^{\circ}$ to 135 $^{\circ}$ C

HEADQUARTERS  
Shirashian Sanat Co.  
No. 419, 10<sup>th</sup> St., 1<sup>st</sup> Blvd.  
Buali Industrial Estate  
6518114334, Hamedan  
Iran  
Tel/Fax: +98 81 34383212-13  
Website: Sascogroup.ir  
Email: Info@Sascogroup.ir  
Date: 21/08/2018  
Version:1.0

## ENVIRONMENTAL

---


Salt Spray:	250 hrs
Humidity:	96 hrs., 93% RH at 40°C
Resistant to gasoline, engine oil, brae fluid & antifreeze	

NOTE: These standard specifications have been met on existing production-tooled units that are tested on precise test equipment. Details are available including failure criteria. This data sheet does not constitute a warranty that the product will meet the above specifications while used in your application or attached to your test equipment.

HEADQUARTERS  
Shirashian Sanat Co.  
No. 419, 10<sup>th</sup> St., 1<sup>st</sup> Blvd.  
Buai Industrial Estate  
6518114334, Hamedan  
Iran  
Tel/Fax: +98 81 34383212-13  
Website: Sascogroup.ir  
Email: [Info@Sascogroup.ir](mailto:Info@Sascogroup.ir)  
Date: 21/08/2018  
Version:1.0

## Dimensional Details (mm)

## Circuit Diagram

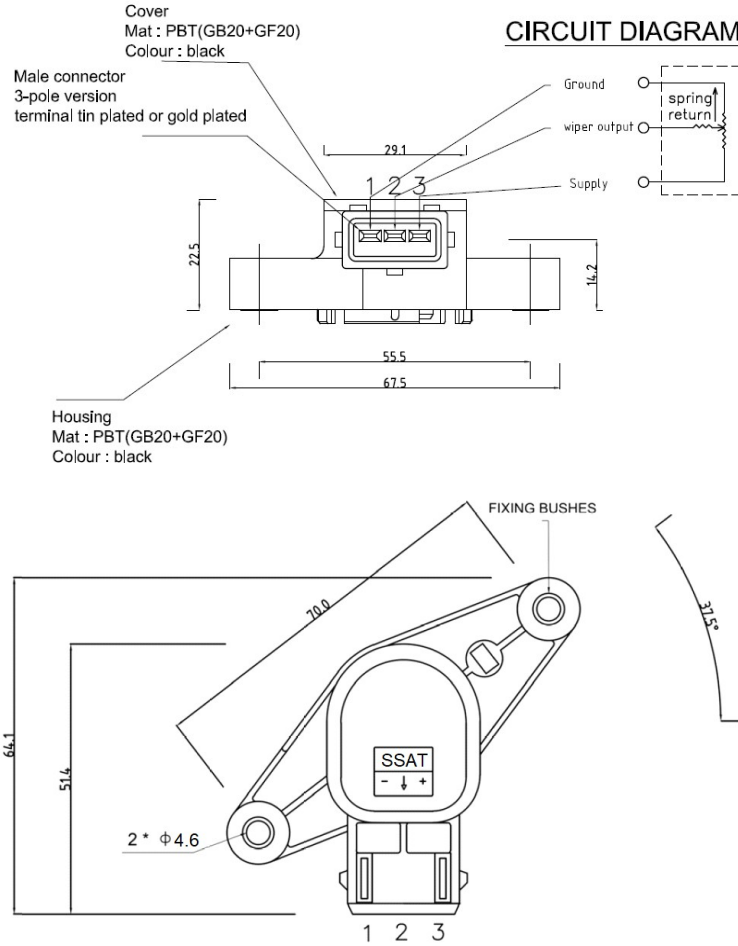


**SG-511-SSAT Series**

HEADQUARTERS  
Shirashian Sanat Co.  
No. 419, 10<sup>th</sup> St., 1<sup>st</sup> Blvd.  
Buali Industrial Estate  
6518114334, Hamedan  
Iran  
Tel/Fax: +98 81 34383212-13  
Website: Sascogroup.ir  
Email: Info@Sascogroup.ir  
Date: 21/08/2018  
Version:1.0


## TPS in First Mechanical Stop

Note the viewpoint  
(this is a back viewpoint, attention to the connector)

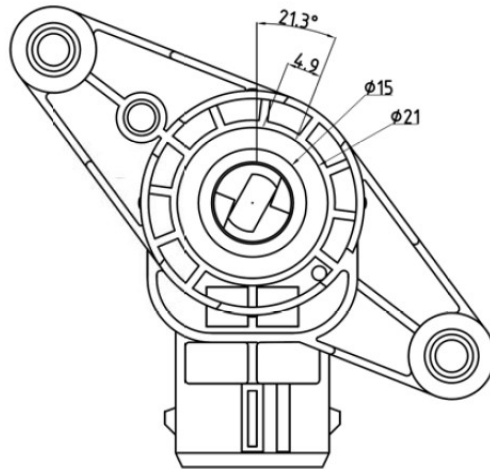


## Throttle Shaft Drawn in Idle Position

Note the viewpoint  
(this is a front viewpoint, attention to the connector)

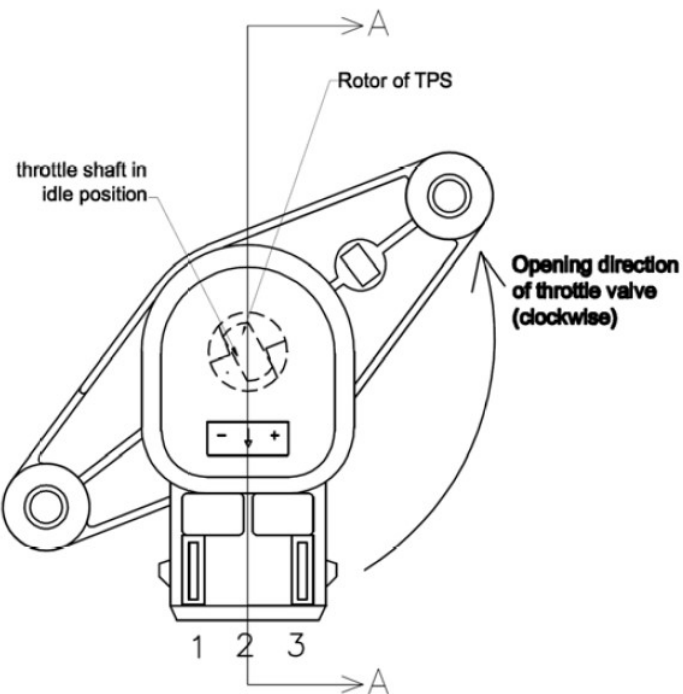

HEADQUARTERS  
Shirashian Sanat Co.  
No. 419, 10<sup>th</sup> St., 1<sup>st</sup> Blvd.  
Buai Industrial Estate  
6518114334, Hamedan  
Iran  
Tel/Fax: +98 81 34383212-13  
Website: Sascogroup.ir  
Email: [Info@Sascogroup.ir](mailto:Info@Sascogroup.ir)  
Date: 21/08/2018  
Version:1.0


## Electrical Characteristics

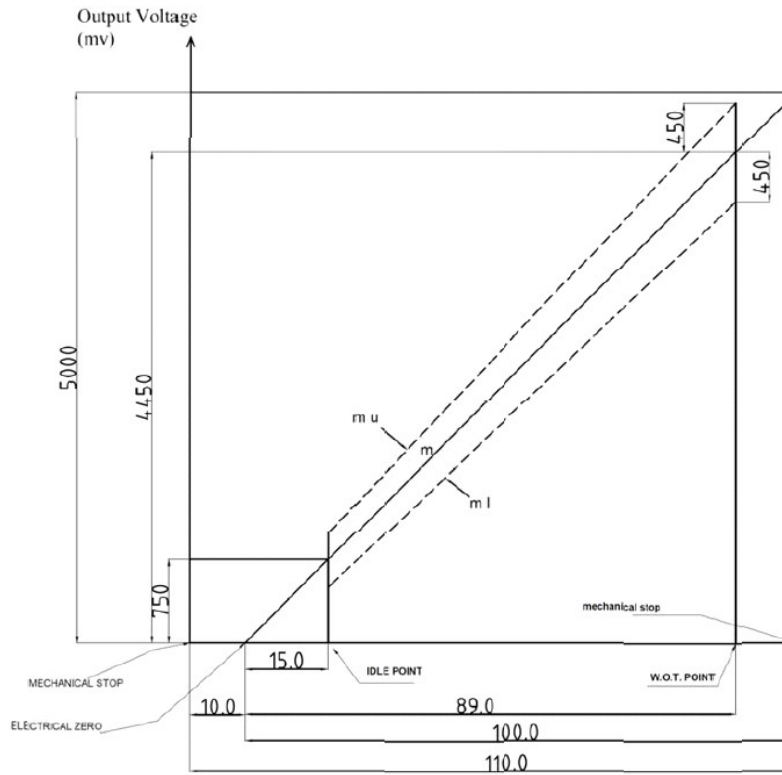

**SG-511-SSAT Series**

HEADQUARTERS  
 Shirashian Sanat Co.  
 No. 419, 10<sup>th</sup> St., 1<sup>st</sup> Blvd.  
 Buali Industrial Estate  
 6518114334, Hamedan  
 Iran  
 Tel/Fax: +98 81 34383212-13  
 Website: Sascogroup.ir  
 Email: [Info@Sascogroup.ir](mailto:Info@Sascogroup.ir)  
 Date: 21/08/2018  
 Version:1.0

## Throttle Shaft Drawn in Rotated Position

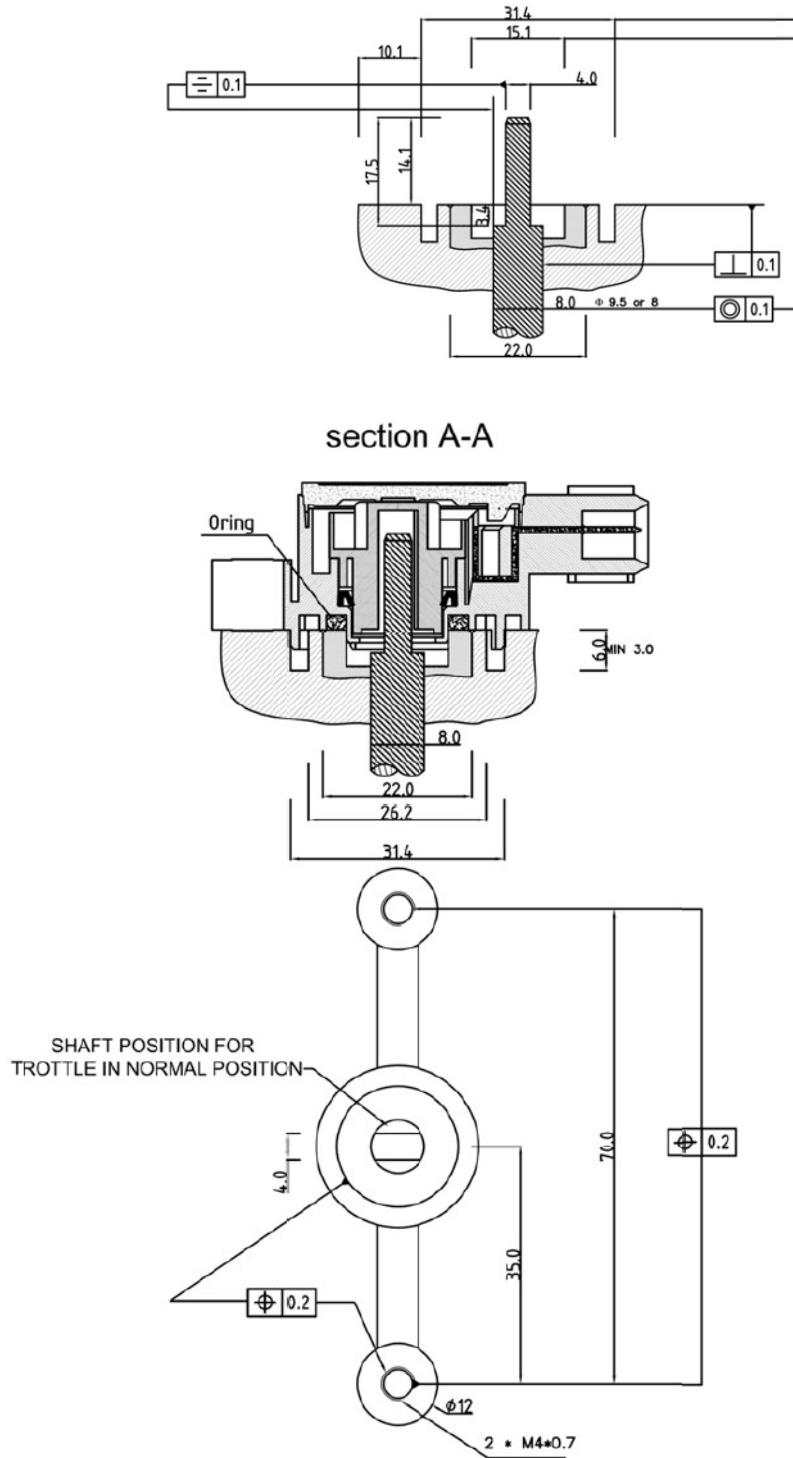

**SG-511-SSAT Series**

HEADQUARTERS  
 Shirashian Sanat Co.  
 No. 419, 10<sup>th</sup> St., 1<sup>st</sup> Blvd.  
 Buali Industrial Estate  
 6518114334, Hamedan  
 Iran  
 Tel/Fax: +98 81 34383212-13  
 Website: Sascogroup.ir  
 Email: [Info@Sascogroup.ir](mailto:Info@Sascogroup.ir)  
 Date: 21/08/2018  
 Version:1.0